



WANSEMI
万芯半导体

WP3025DPA

Enhancement Mode N+P-Channel Power MOSFET

PDFN5x6/N+P/30V.-30V/ $\pm$ 20V/1.6V.-1.6V/

25A.-19A/12.5m Ω .31.5m Ω

Rev0.2

30V N+P-Channel MOSFET

1.Features

- ◆ High power and current handing capability
- ◆ Lead free product is acquired
- ◆ Fast switching
- ◆ Surface mount package

◆ N-Channel


V_{DS}	$R_{DS(on)}$ Typ.	I_D
30V	12.5mΩ @ 10V	25A
	16.5mΩ @ 4.5V	

◆ P-Channel


V_{DS}	$R_{DS(on)}$ Typ.	I_D
-30V	31.5mΩ @ -10V	-19A
	45.0mΩ @ -4.5V	

2.Applications

- ◆ DC motor
- ◆ PWM applications



PDFN5x6
Pin Description

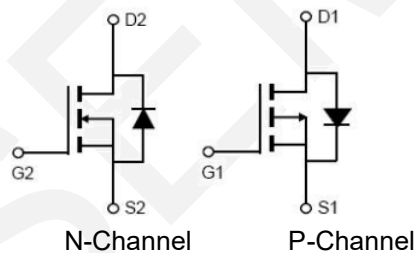

Schematic Diagram

3.Package Marking and Ordering Information

Part no.	Marking	Package	PCS/Tube	PCS/CTN.
WP3025DPA	WP3025DPA	PDFN5X6	5,000	50,000

4.Absolute Max Ratings at Ta=25°C (Note1)

Parameter	Symbol	N-channel	P-channel	Units
Drain to Source Voltage	V_{DSS}	30	-30	V
Gate to Source Voltage	V_{GSS}	±20	±20	V
Drain Current (DC)	I_D	25	-19	A
Drain Current (Pulse), $PW \leq 300\mu s$	I_{DM}	90	-60	A
Total Dissipation	P_D	21		W
Junction Temperature	T_j	-55 to +175		°C
Storage Temperature	T_{stg}			

Note 1: Stresses exceeding those listed in the Maximum Ratings table may damage the device. If any of these limits are exceeded, device functionality should not be assumed, damage may occur and reliability may be affected.

5. Thermal Resistance Ratings (Note 2)

Parameter	Symbol	N-channel	P-channel	Unit
Maximum Junction-to-Ambient	$R_{\theta JA}$	7	7	$^{\circ}\text{C/W}$

Note 2: When mounted on 1 inch square copper board $t \leq 10\text{sec}$ The value in any given application depends on the user's specific board design.

6. Electrical Characteristics at $T_a=25^{\circ}\text{C}$ (Note 3)
N-Channel

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Drain to Source Breakdown Voltage	$V_{(BR)DSS}$	$I_D = 250\mu\text{A}$, $V_{GS} = 0\text{V}$	30			V
Zero-Gate Voltage Drain Current	I_{DSS}	$V_{DS} = 30\text{V}$, $V_{GS} = 0\text{V}$			1	μA
Gate to Source Leakage Current	I_{GSS}	$V_{GS} = \pm 20\text{V}$, $V_{DS} = 0\text{V}$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}$, $I_{DS}=250\mu\text{A}$	1.0		2.5	V
Static Drain to Source On-State Resistance	$R_{DS(on)}$	$I_D = 7\text{A}$, $V_{GS} = 10\text{V}$		12.5	15	$\text{m}\Omega$
		$I_D = 6\text{A}$, $V_{GS} = 4.5\text{V}$		16.5	20	$\text{m}\Omega$
Input Capacitance	C_{iss}	$V_{GS}=0\text{V}$, $V_{DS}=15\text{V}$, Frequency=1.0MHz		450		pF
Output Capacitance	C_{oss}			150	-	pF
Reverse Transfer Capacitance	C_{rss}			90	-	pF
Turn-ON Delay Time	$t_{d(on)}$	$V_{DD} = 15\text{V}$ $V_{GS} = 10\text{V}$ $R_G = 3\Omega$ $R_L = 2.5\Omega$		5	-	ns
Rise Time	t_r			12	-	ns
Turn-OFF Delay Time	$t_{d(off)}$			19	-	ns
Fall Time	t_f			6	-	ns
Total Gate Charge	Q_g	$V_{DS} = 15\text{V}$, $V_{GS} = 10\text{V}$, $I_D = 6\text{A}$		9.5		nC
	Q_{gs}			2		nC
	Q_{gd}			1.9		nC
Diode Forward Voltage	V_{FSD}	$I_S = 25\text{A}$, $V_{GS} = 0\text{V}$			1.2	V







P-Channel

Parameter	Symbol	Test Conditions	Min.	Typ.	Max.	Units
Drain to Source Breakdown Voltage	$V_{(BR)DSS}$	$I_D = -250\mu A, V_{GS} = 0V$	-30			V
Zero-Gate Voltage Drain Current	I_{DSS}	$V_{DS} = -20V, V_{GS} = 0V$			-1	μA
Gate to Source Leakage Current	I_{GSS}	$V_{GS} = \pm 20V, V_{DS} = 0V$			± 100	nA
Gate Threshold Voltage	$V_{GS(th)}$	$V_{DS}=V_{GS}, I_{DS}=-250\mu A$	-1.0		-2.5	V
Static Drain to Source On-State Resistance	$R_{DS(on)}$	$I_D = -6A, V_{GS} = -10V$		31.5	38	m Ω
		$I_D = -5A, V_{GS} = -4.5V$		45.0	68	m Ω
Input Capacitance	C_{iss}	$V_{GS}=0V,$ $V_{DS}=-30V,$ Frequency=1.0MHz		920	-	pF
Output Capacitance	C_{oss}			140	-	pF
Reverse Transfer Capacitance	C_{rss}			90	-	pF
Turn-ON Delay Time	$t_{d(on)}$	$V_{DD} = -15V$ $V_{GS} = -10V$ $R_{GEN} = 3\Omega,$ $R_L = 1.5\Omega,$		8	-	ns
Rise Time	t_r			30	-	ns
Turn-OFF Delay Time	$t_{d(off)}$			22	-	ns
Fall Time	t_f			26	-	ns
Total Gate Charge	Q_g	$V_{DS} = -15V,$ $V_{GS} = -10V,$ $I_D = -6A$		16.2		nC
	Q_{gs}			2.9		nC
	Q_{gd}			3.6		nC
Diode Forward Voltage	V_{FSD}	$I_S = -6A, V_{GS} = 0V$			-1.2	V

Note 3: Product parametric performance is indicated in the Electrical Characteristics for the listed test conditions, unless otherwise noted. Product performance may not be indicated by the Electrical Characteristics if operated under different conditions.


7. Typical electrical and thermal characteristics

N-Channel

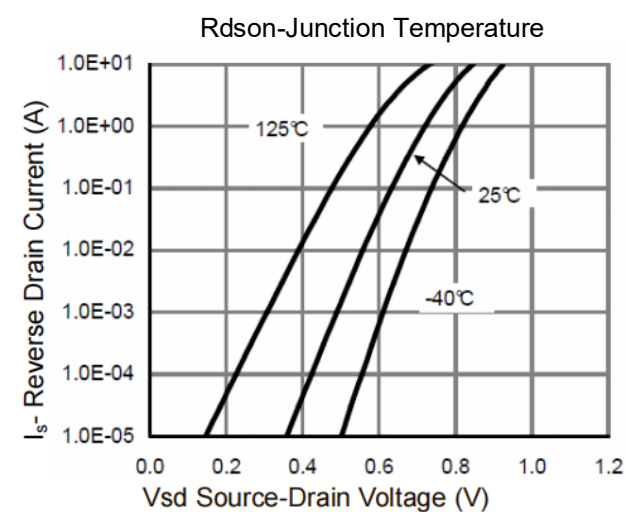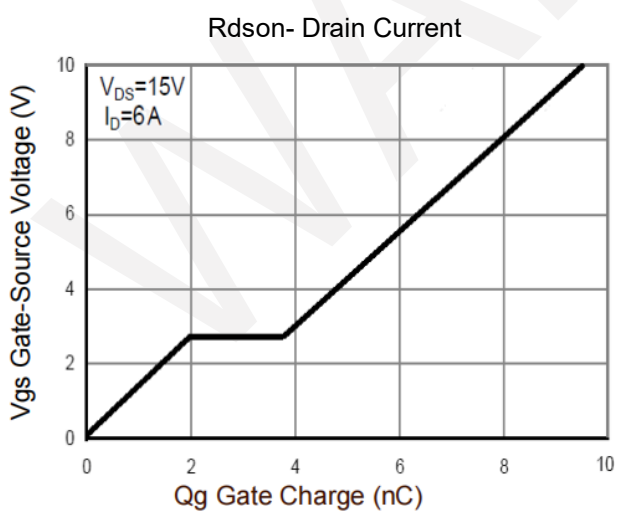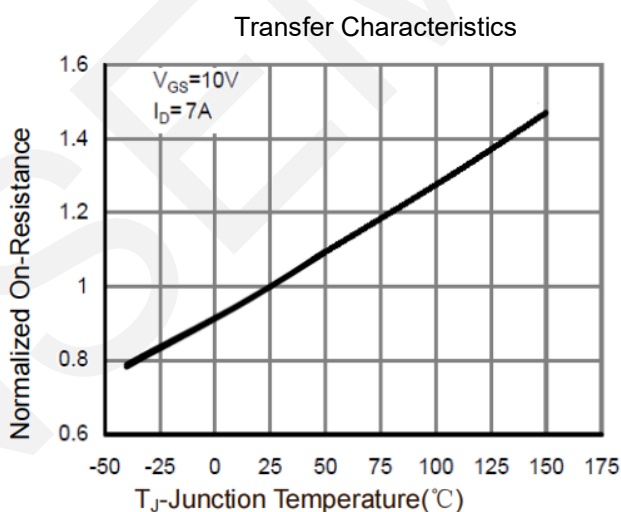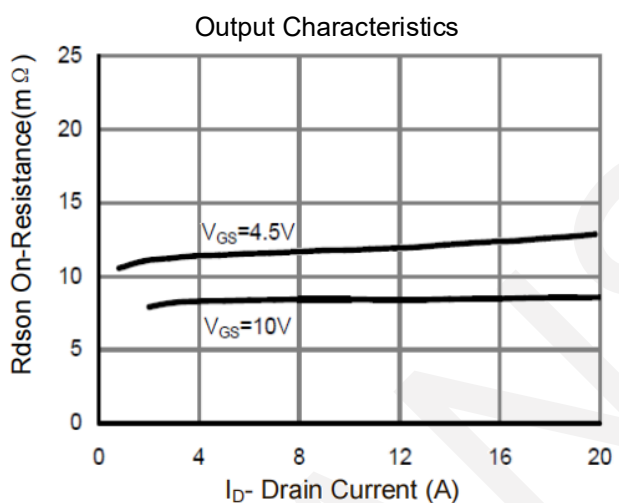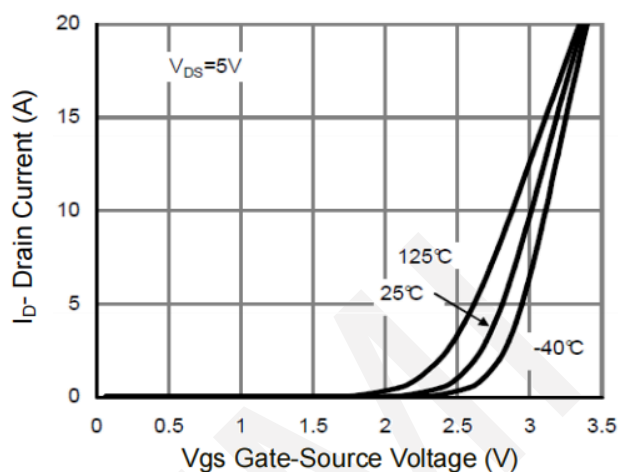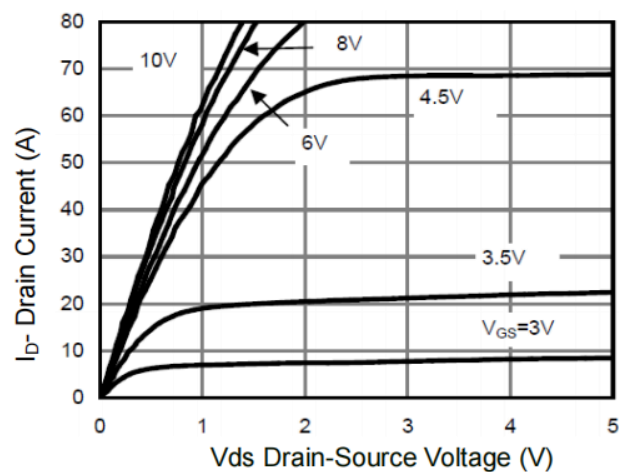


Gate Charge


Source- Drain Diode Forward

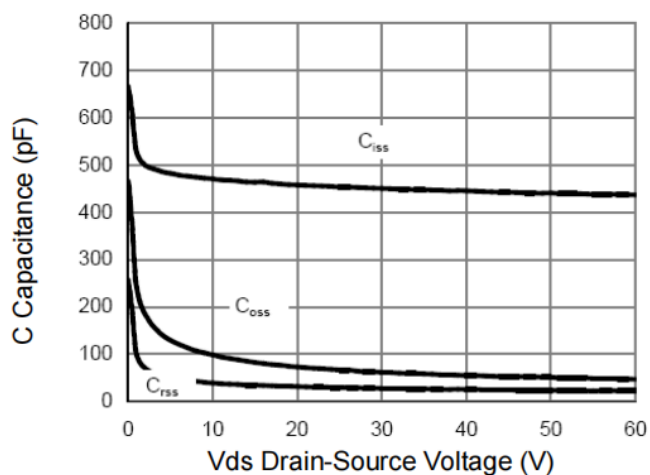


Capacitance vs V_{ds}

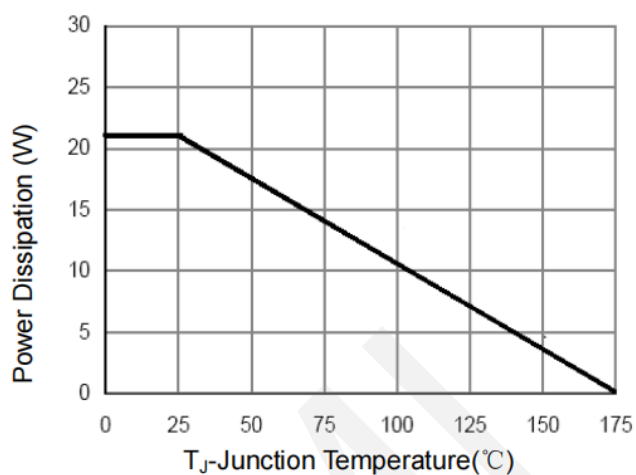

Power De-rating

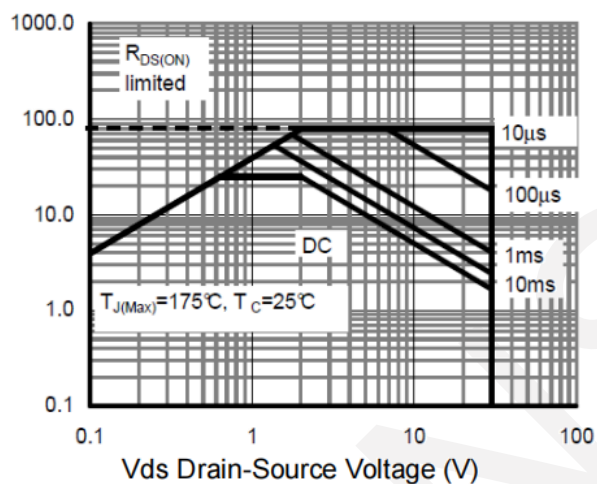


Safe Operation Area

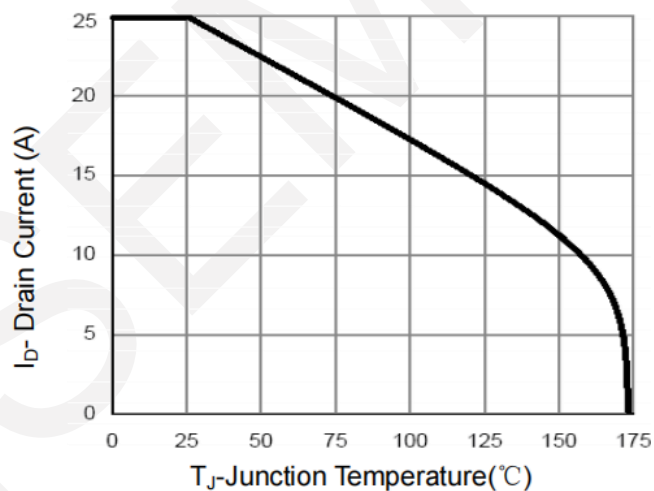


Current De-rating




P-Channel

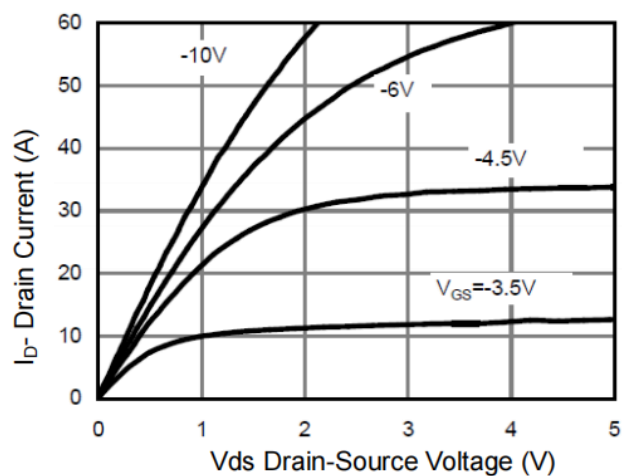


Output Characteristics

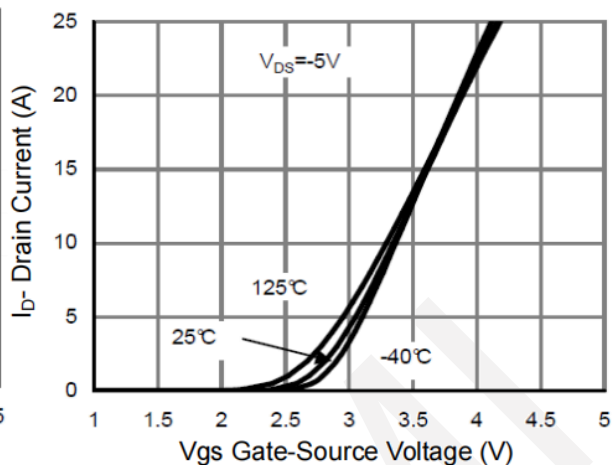


Transfer Characteristics

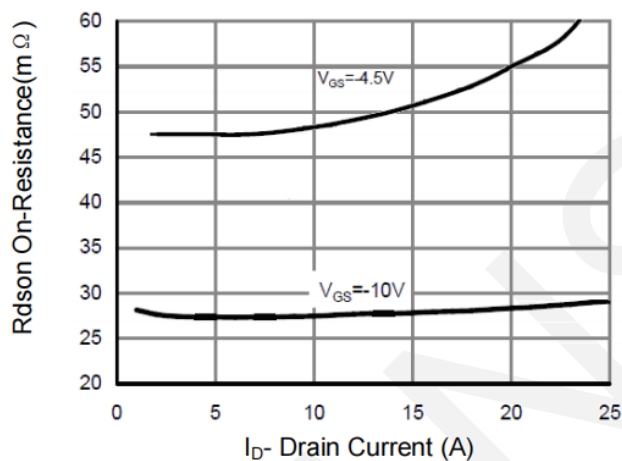


$R_{DS(on)}$ - Drain Current

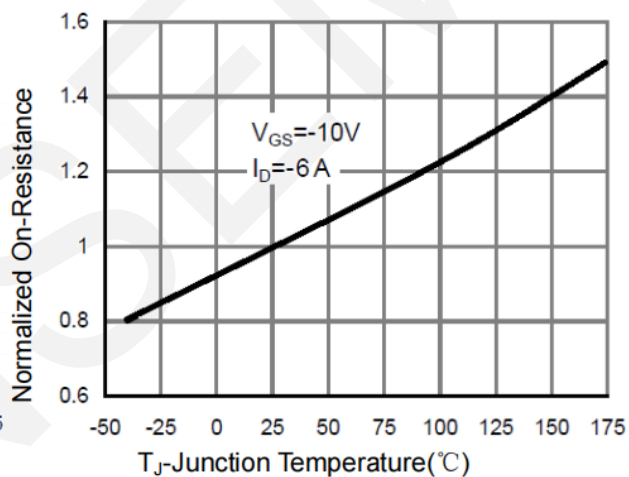





$R_{DS(on)}$ -Junction Temperature

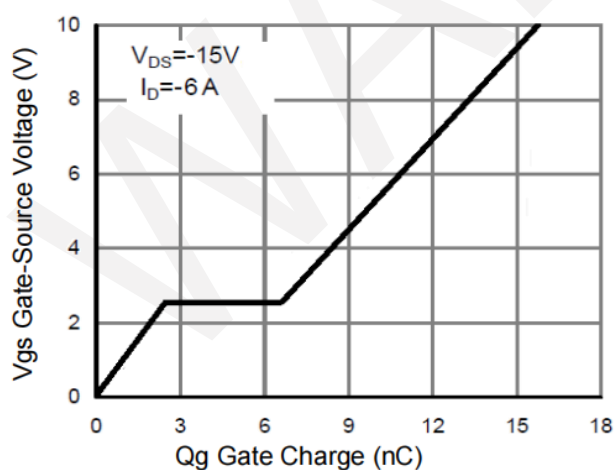


Gate Charge

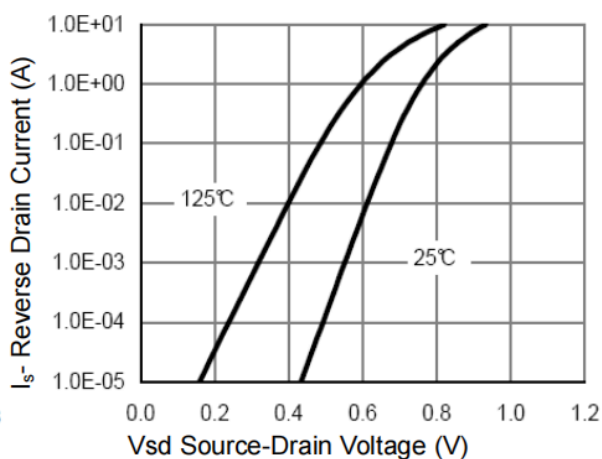

Source- Drain Diode Forward

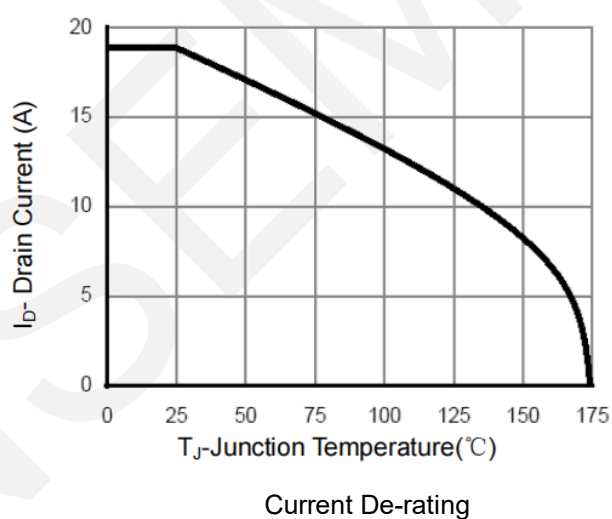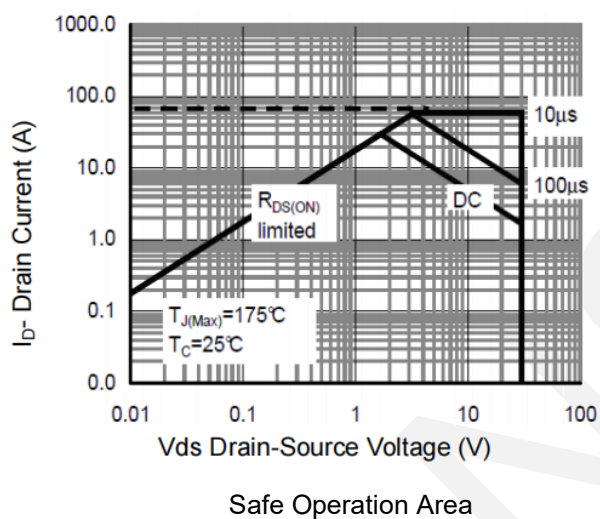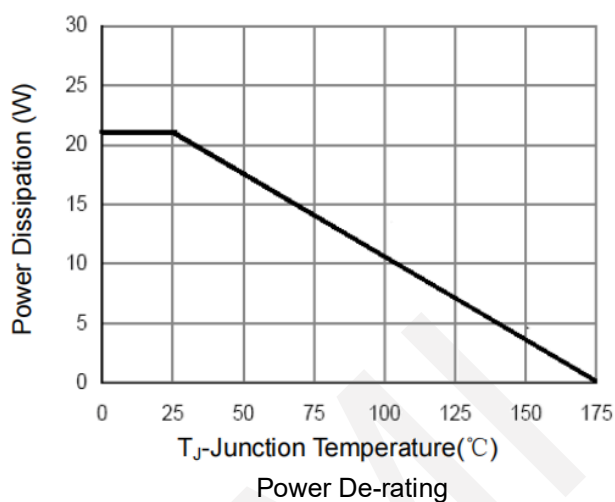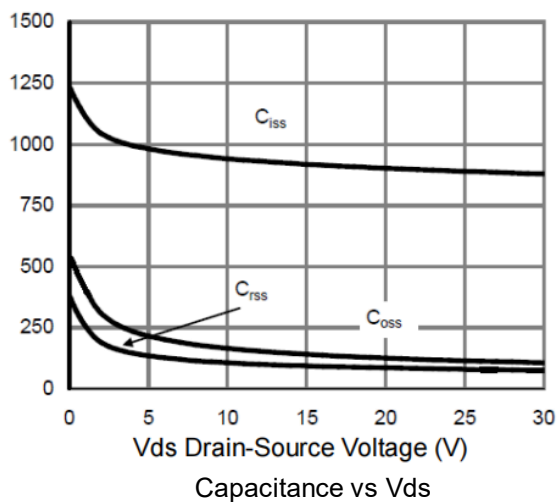

8.Package Dimensions

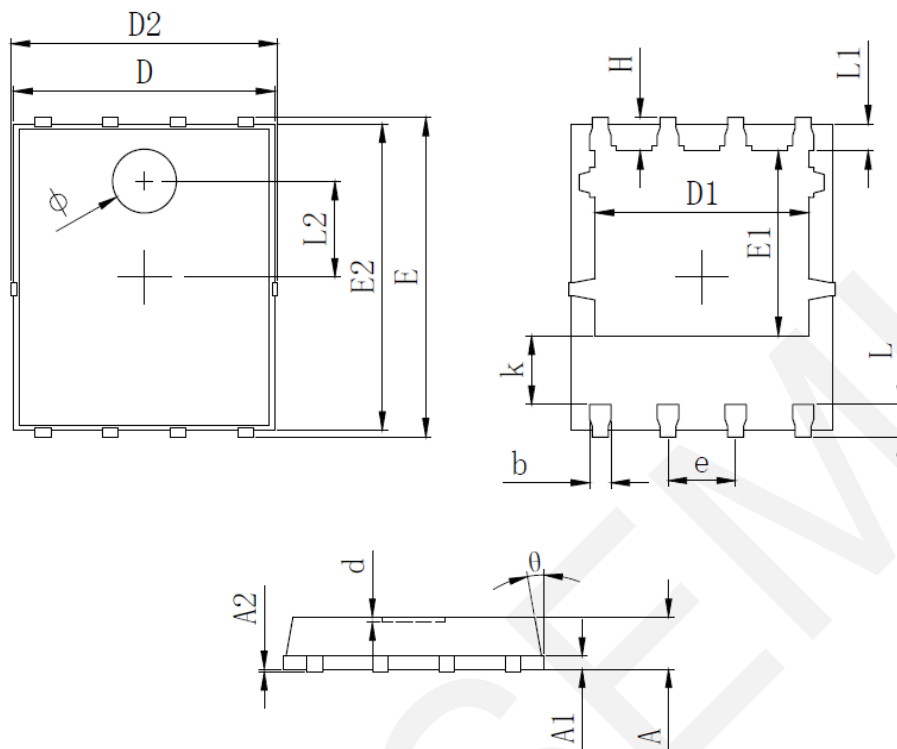

SYMBOL	MILLIMETER		
	MIN	Typ.	MAX
A	0.900	1.000	1.100
A1	0.254 REF.		
A2	0~0.05		
D	4.824	4.900	4.976
D1	3.910	4.010	4.110
D2	4.924	5.000	5.076
E	5.924	6.000	6.076
E1	3.375	3.475	3.575
E2	5.674	5.750	5.826
b	0.350	0.400	0.450
e	1.270 TYP.		
L	0.534	0.610	0.686
L1	0.424	0.500	0.576
L2	1.800 REF.		
k	1.190	1.290	1.390
H	0.549	0.625	0.701
θ	8°	10°	12°
Φ	1.100	1.200	1.300
d			0.100

9. Important Notice

WAN SEMICONDUCTOR (NINGBO) CO.,LTD reserves the right to make corrections, enhancements, improvements and other changes to its semiconductor products and services and to discontinue any product or service. Buyers should obtain the latest relevant information before placing orders and should verify that such information is current and complete. All semiconductor products (also referred to herein as “components”) are sold subject to WANSEMI’s terms and conditions of sale supplied at the time of order acknowledgment.

WANSEMI warrants performance of its components to the specifications applicable at the time of sale, in accordance with the warranty in WANSEMI’s terms and conditions of sale of semiconductor products. Testing and other quality control techniques are used to the extent WANSEMI deems necessary to support this warranty. Except where mandated by applicable law, testing of all parameters of each component is not necessarily performed.

WANSEMI assumes no liability for applications assistance or the design of Buyers’ products. Buyers are responsible for their products and applications using WANSEMI components. To minimize the risks associated with Buyers’ products and applications, Buyers should provide adequate design and operating safeguards.

No WANSEMI components are authorized for use in FDA Class III (or similar life-critical medical equipment) unless authorized officers of the parties have executed a special agreement specifically governing such use.

Unless WANSEMI has specifically designated certain components which meet ISO/TS16949 requirements, mainly for automotive use, WANSEMI will not be responsible for any failure of such components to meet such requirements.